

1. REFER TO SHEET ON.1 FOR GENERAL NOTES. 2. ROOFING MATERIAL PER SELECTIONS.

Key Notes:

- 1 (ELEV. A) CANTILEVER GABLE END TRUSS TO COVER STONE VENEER BELOW SEE DETAIL D/7.02
- 2 (ELEV. C) HOLD BOTTOM OF 8" TRIM 1'-7 1/4" ABOVE TOP OF WINDOWS.

BRICK and STONE LINTEL SCHEDULE

		J. J. J			
	SPAN	36" HIGH	48" HIGH	LINTEL SIZE	WINDOW ABOVE
DAICA	Up to 6'-0"			L3 ½ x 3 ½ x ¼	
	Up to 8'-3"			L5 x 3 ½ x ¾	
	Up to 9'-3"			L6 x 4 x 5/16	L7 x 4 x 3/ ₈
	Up to 16'-3"	L7 x 4 x 3/8	L8 x 4 x ½	L8 x 4 x ½	**per Design
	Up to 6'-0"			L4 x 3 ½ x ¼	
	Up to 8'-3"			L5 x 3 ½ x ¾	
	Up to 9'-3"		L6 x 4 x 3 ₈	L7 x 4 x 3/8	**per Design
	Up to 16'-3"		L8 x 4 x 1/2	**per Design	**per Design

All Lintels: 4" Minimum bearing required each end

* Brick is based on 40pst and Stone is based on 60pst

** Any lintels not described by the above parameters shall be specifically designed.

Space for Architect Seal

RESIDENCE FOR:

CUSTOMER NAME

JOB ADDRESS

SUBDIVISION NAME XXXX-XXXX-XX XX.XX.XXXX COORD_NAME

ALDEN


House Name:

SERIES_NM Plan No.: PLAN NM

COORD_PHONE

Elevation "F"

Copyright © 2019, (2019) The Drees Company. All Rights Reserved. 211 Grandview Drive, Fort Mitchell, KY 41017 Phone: [859] 578-4200

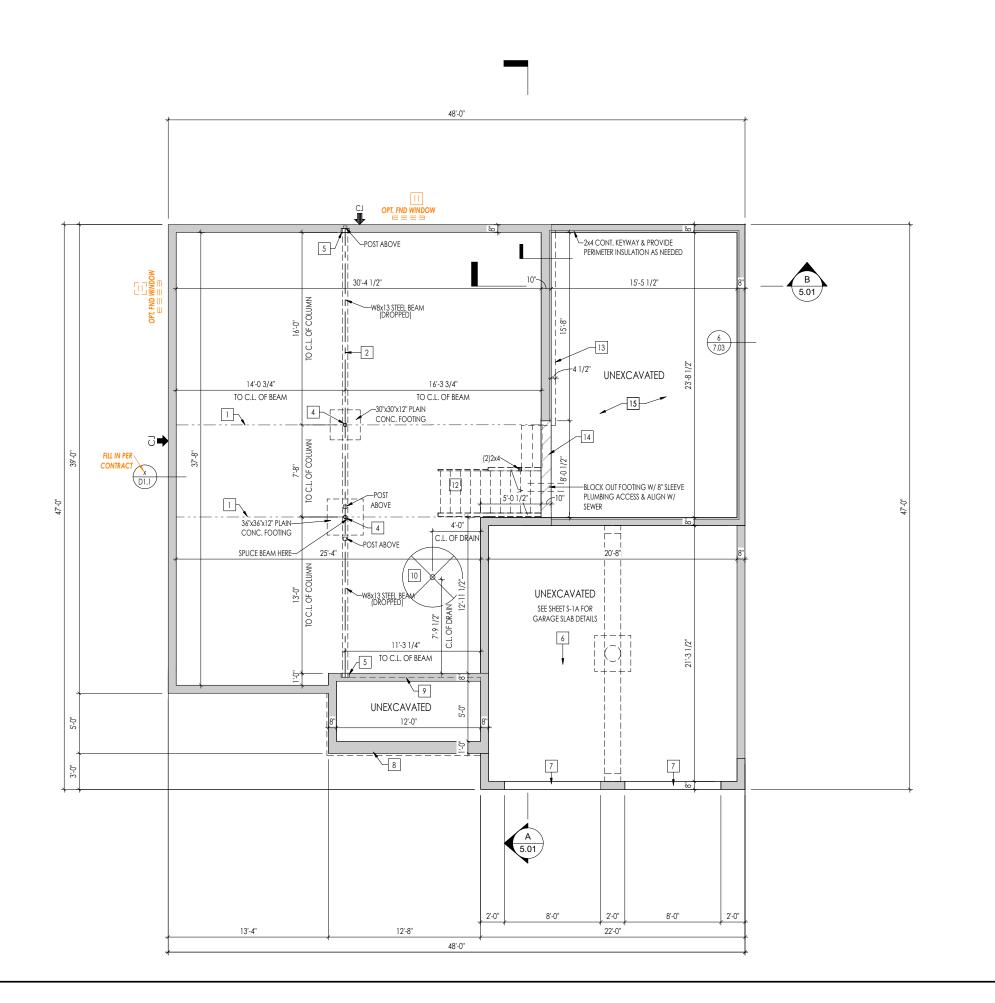

- 1. REFER TO SHEET ON.1 FOR GENERAL NOTES. 2. ALL FOUNDATION WALLS TO BE 8'-0" TALL AND 8" THICK UNLESS OTHERWISE NOTED. 3. OVERALL FOUNDATION WALL HEIGHT MAY VARY UP TO 1".
- 4. SEE SHEET ON.1 FOR VERTICAL FOUNDATION WALL CONTROL JOINT LOCATIONS.

Key Notes:

- 1 SLAB CONTROL JOINT
- 2 SLAB CONTROL JOINT LOCATED DIRECTLY UNDER STEEL BEAM
- 4 3" DIA. 11 GA. ADJUSTABLE STEEL PIPE COLUMN
- 5 8"W. x 8"H. x 4"D. BEAM POCKET
- GARAGE SLAB TO BE HELD A MINIMUM OF 4" BELOW TOP OF FOUNDATION AND IS TO SLOPE 1/4" PER FOOT TOWARDS GARAGE DOOR
- 7 CONTINUOUS FOOTING AND FOUNDATION; DROP TO BE FIELD DETERMINED
- 1-1/2" TYP, OVERHANG AT CONCRETE PORCH SLAB ABOVE SEE SPECIFICATION MANUAL FOR FRONT PORCH CONSTRUCTION
- 9 LINE OF STUD WALL/PORCH SLAB ABOVE SEE DETAIL B/7.01 FOR MORE INFORMATION
- 10 5'0" DIA. AREA SLOPED TO DRAIN; 2" LOWER THAN TOP OF SLAB
- OPT. BSMT WINDOW HEADER TO BE HELD FLUSH IN SUBFLOOR; 2x12 HDR W/ 2x12 FLOOR SYSTEM; OR CONT. END JOIST W/ TJI FLOOR SYSTEM, LARGER WINDOWS TO USE CONCRETE HEADER
- 12 OUTLINE OF BASEMENT STAIRS
- OUTLINE OF FIRST FLOOR ABOVE CANTILEVER JOISTS AND PROVIDE KNEEWALL FROM BOTTOM OF

 JOISTS TO TOP OF GAMEROOM SLAB SEE SECTION B/S.01

 AT THIS AREA UNDER GAMEROOM SLAB, DROP TOP OF FOUNDATION WALL 1'-3 1/8" FOR SLAB
 SUPPORT SEE DETAIL C/7.01
- CONC. SLAB ABOVE IN THIS AREA HOLD TOP OF SLAB @ 9-1/8" DOWN FROM TOP OF FDN. WALL. FILL OVERDIG COMPLETELY W/ SELF-COMPACTING GRAVEL FILL. CONCRETE STRENGTH AT SLAB: 3500 PSI
- 17 (INDY + CLV): BRICK LEDGE FIELD VERIFY DROPPED BRICK LOCATIONS

Space for Architect Seal

RESIDENCE FOR:

CUSTOMER NAME

JOB ADDRESS


SUBDIVISION NAME

Job Number XX.XX.XXXX COORD_NAME COORD_PHONE XXXX-XXXX-XX House Name:

ALDEN

SERIES_NM Plan No. PLAN NM



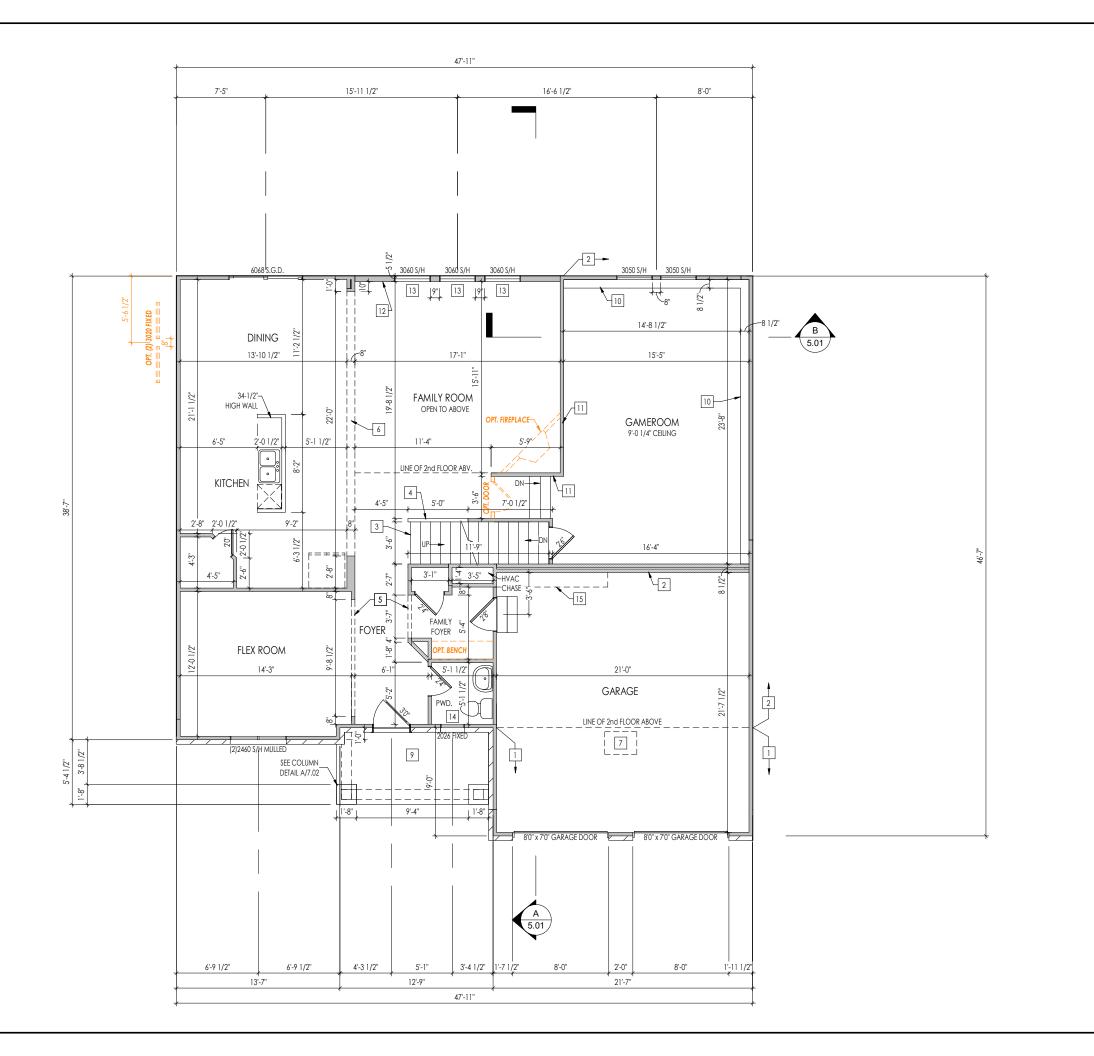

- . REFER TO SHEET ON.1 FOR GENERAL NOTES.
- 1. ALL EN G SILECTIONS TO BE 9-1" ABOVE SUBFLOOR UNLESS OTHERWISE NOTED
 3. FRAME TOP OF ALL WINDOWS AT 1"-0 1/4" BELOW TOP OF PLATE UNLESS OTHERWISE NOTED.
- 4. ALL DROPPED, INTERIOR HEADERS (FALSE AND BEARING) ARE DROPPED 1'-0" FROM CEILING UNLESS
- CALCULATIONS REQUIRE LARGER HEADERS.
- 5. REFER TO SELECTION SHEETS FOR FLOORING MATERIAL PRIOR TO CONSTRUCTING STAIRS TO DETERMINE RISER HEIGHTS.
- 6. REFER TO SHEET 2.01S FOR STRUCTURAL INFORMATION.

Key Notes:

- FRAME GARAGE WALL AT 10'-3 1/8" HIGH FROM TOP OF FDN. WALL AT FRONT OF GARAGE.
- FRAME GARAGE WALL AT 8'-3 1/8" HIGH FROM TOP OF FDN. WALL AT AREAS UNDER 2ND FLOOR (OR AT OPT. CARRIAGE GARAGE, 3-CAR FRONT ENTRY GARAGE BAY, OR OPT. GARAGE STORAGE)
- 3 RE: DETAIL C & D/7.01 FOR STAIR FRAMING DETAILS
- REFER TO SELECTIONS STD. 36"H. WALL SLOPED W/ STRINGER OR W/ OPT. RAIL, HOLD TOP OF WALL EVEN WITH STAIR STRINGER
- 5 FRAME TOP OF OPENING AT 1'-0" DOWN FROM CEILING.
- 6 HOLD TOP OF OPENING TIGHT TO BOTTOM OF BEAM ABOVE.
- 7 22-1/2" x 32" ATTIC ACCESS
- 8 OPT. BENCH RE: STANDARD DETAIL F/D2.2 (INDY ONLY)
- 9 CARPENTER TO DROP ELECTRICAL WIRE THROUGH PORCH CEILING FOR LIGHTS
- FRAME TOP OF KNEE WALL FLUSH WITH BOTTOM OF WINDOW SILLS W/ 2x4 STUDS @ 16" O.C. HELD 1" FROM FOUNDATION WALL WITH 3-1/2" INSULATION SEE SECTION B/5.01
- FRAME KNEE WALL FROM GAMEROOM SLAB TO UNDERSIDE OF CANT'D. FAMILY ROOM FLOOR JOISTS W/ 2x4 STUDS @ 16" O.C. HELD 1" FROM FOUNDATION WALL WITH 3-1/2" INSULATION - SEE B/5.01
- 12 BALLOON FRAMED WALL SEE SHEET 2.01S.
- 13 FRAME TOP OF WINDOWS AT 8'-0 3/4" A.F.F. (W/ STD. 2-STORY FAMILY ROOM)
- 14 FRAME TOP OF WINDOW AT 7'-0 3/4" A.F.F.
- 15 DROP CEILING AS NEEDED FOR PLUMBING ABOVE
- 16 -

Space for Architect Seal

RESIDENCE FOR:

CUSTOMER NAME

JOB ADDRESS

SUBDIVISION NAME XXXX-XXXX-XX XX.XX.XXXX COORD_NAME

ALDEN

House Name:

COORD_PHONE


SERIES_NM Plan No.

Elevation "F"

PLAN NM



211 Grandview Drive, Fort Mitchell, KY 41017 Phone: [859] 578-4200

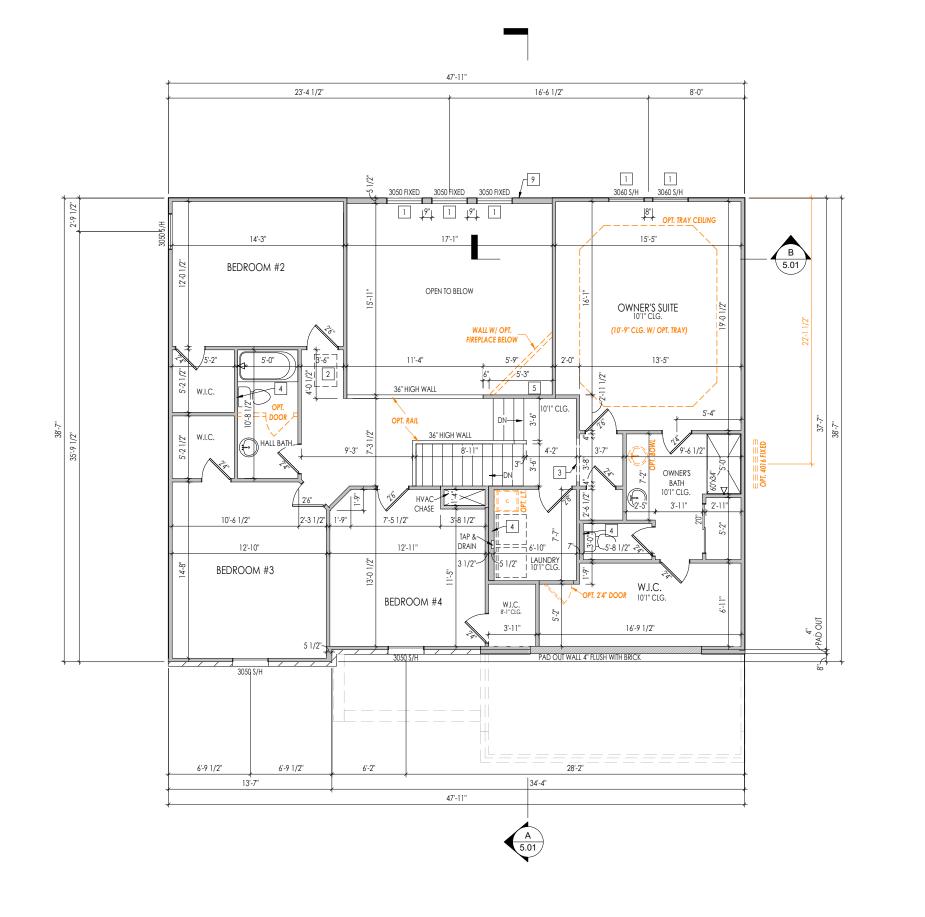

- . REFER TO SHEET ON.1 FOR GENERAL NOTES.
- 1. ALL EN OS ILECTION TO SECURIAL NOTES.
 2. ALL SECOND FLOOR CELLINGS TO BE 8-1" ABOVE SUBFLOOR UNLESS OTHERWISE NOTED.
 3. FRAME TOP OF ALL WINDOWS AT 1"-0 1/4" BELOW TOP OF PLATE UNLESS OTHERWISE NOTED.
- 4. ALL DROPPED, INTERIOR HEADERS (FALSE AND BEARING) ARE DROPPED 1'-0" FROM CEILING UNLESS
- CALCULATIONS REQUIRE LARGER HEADERS.
- S. REFER TO SELECTION SHEETS FOR FLOORING MATERIAL PRIOR TO CONSTRUCTING STAIRS TO DETERMINE RISER HEIGHTS.
- 6. REFER TO SHEET 2.02S FOR STRUCTURAL INFORMATION.

Key Notes:

- 1 FRAME TOP OF WINDOW AT 2'-0 1/4" DOWN FROM CEILING
- 2 22-1/2" x 32" ATTIC ACCESS
- 3 FALSE HEADER DROPPED 1'-0" DOWN FROM CEILING
- 4 DO NOT LOCATE TRUSS ABOVE PLUMBING WALL.
- 5 CHASE FOR (OPT.) FIREPLACE
- 6 (OPT. GARDEN BATH) FRAME BOTTOM OF WINDOW IN OWNERS BATH AT 3'-0 3/4" A.F.F.
- 7 (OPT. SUPER SHOWER) PROVIDE 4-1/2" H. SHOWER CURB AT MUD PAN
- REFER TO SELECTIONS STD. 36"H. WALL SLOPED W/ STRINGER OR W/ OPT. RAIL, HOLD TOP OF WALL EVEN WITH STAIR STRINGER
- 9 BALLOON FRAMED WALL SEE SHEET 2.02S

- 16

Space for Architect Seal

RESIDENCE FOR:

CUSTOMER NAME

JOB ADDRESS

SUBDIVISION NAME

XXXX-XXXX-XX XX.XX.XXXX COORD_NAME House Name:

ALDEN

SERIES_NM Plan No.: PLAN NM

COORD_PHONE



TRUSS MANUFACTURER TO VERIFY THE FOLLOWING: (REFER TO SHEETS 2.01F AND/OR 2.02F) 1) DO NOT LOCATE ROOF TRUSSES ABOVE PARALLEL PLUMBING WALLS OR KITCHEN HOOD WALLS

OPT. TRAY CLG.

12:12

VALLERY TRUSS O.F.

@ 24" O.C. |

GIRDER TRUSS

CURVED ROOF DORMER G (SEE DETAIL C/7.02)

9'-4"

V.T.

OVERFRAMING

2'-11"

1' 11-3/4" HEEL CUT

12:12

INO ROOF DECKING UNDER (OVERFRAMING IN THIS AREA TO ALLOW)

FOR PROPER ATTIC VENTILATION

12:12

POT VENTS (TYP.)

12:12

12'-4 1/2"

5'-0"

4

12:12

5'-0"

CURVED ROOF (RE: 6.01)

CENTER OVER WINDOW (TYP.)

			OVERHANG		
			1'-0"	2'-0'	
	ROOF PITCH	4:12	3-3/4"	7-3/4	
		5:12	4-3/4"	9-3/4	
		6:12	5-3/4"	11-3/	
		7:12	6-3/4"	13-3/	
		8:12	7-3/4"	N/A	
		9:12	8-3/4"	N/A	
		10:12	9-3/4"	N/A	
		12:12	11-3/4"	N/A	
		14:12	13-3/4"	N/A	

2) DO NOT LOCATE ROOF TRUSSES ABOVE HVAC CHASES (OR LEAVE A MIN. 22-1/2" WIDE CLEAR SPACE OVER CHASE)

		OVERHANG	
		1'-0"	2'-0"
	4:12	3-3/4"	7-3/4"
	5:12	4-3/4"	9-3/4"
	6:12	5-3/4"	11-3/4"
둳	7:12	6-3/4"	13-3/4"
ROOF PITCH	8:12	7-3/4"	N/A
8 S	9:12	8-3/4"	N/A
	10:12	9-3/4"	N/A
	12:12	11-3/4"	N/A
	14:12	13-3/4"	N/A

HEEL CUT STANDARDS

General Notes: . REFER TO SHEET ON.1 FOR GENERAL NOTES. Key Notes: 1 (ELEV. A) - CANTILEVER GABLE END TRUSS TO COVER STONE VENEER BELOW - SEE DETAIL D/7.02

- 2 DO NOT REMOVE ROOF SHEATHING UNDER GABLE TO CONNECT ATTIC SPACES, ROOFS TO BE VENTED SEPARATELY
- 3 SADDLE: MIN. 5:12 PITCH EXTEND 18" PAST FRAME WALL
- (ELEV. F) 8:12 PITCH AT FLARED OVERHANG -SEE SHEET 6.01 AND DETAIL B/7.02
- [5] (ELEV. F) DORMER OVER-FRAMING, PROVIDE 2x_ BLOCKING @ 24" O.C. BETWEEN ROOF TRUSS TOP CHORDS RE: C/7.02

CONNECTION SPECIFICATIONS (TYP. U.N.O.)

NOTE: 10d NAIL = 3" x 0.131" GUN NAIL			
JOIST TO SOLE PLATE	(3)10d TOENAILS		
SOLE PLATE TO JOIST/BLK'G.	10d NAILS @ 6" o.c.		
STUD TO SOLE PLATE	(3) 10d TOENAILS		
TOP OR SOLE PLATE TO STUD	(3)10d NAILS		
RIM TO TOP PLATE	10d TOENAILS @ 6" o.c.		
BLK'G. BTWN. JOISTS TO TOP PL.	(3) 10d TOENAILS		
RAFTER/TRUSS TO TOP PLATE	(3) 10d TOENAILS + (1) SIMPSON H2.5A		
GAB. END TRUSS TO DBL. TOP PL.	10d TOENAILS @ 8" o.c.		
R.T. w/ HEEL HT. 9 1/4" TO 12"	2x10 BLK EVERY 3RD BAY FASTENED TO DBL, TOP PLATE w/ 10d TOENAILS @ 6" O.C.		
R.T. w/ HEEL HT. 12" TO 16"	2x12 BLK EVERY 3RD BAY FASTENED TO DBL. TOP PLATE w/ 10d TOENAILS @ 6" O.C.		
R.T. w/ HEEL HT. UP TO 24"	LAP WALL SHTG. w/ DBL. TOP PL. & INSTALL ON TRUSS VERT FASTEN w/ 8d NAILS @ 6" O.C.		
R.T. w/ HEEL HT. 24" TO 48"	LAP WALL SHTG. w/ DBL. TOP PL. & INSTALL ON TRUSS VERT FASTEN w/ 8d NAILS @ 6" O.C. PROVIDE 2x BLK @ EA. BAY AT TOP OF HEEL		
DOUBLE STUD	10d NAILS @ 24" o.c.		
DOUBLE TOP PLATE	10d NAILS @ 24" o.c.		
DOUBLE TOP PLATE LAP SPLICE	(10)10d NAILS IN LAPPED AREA		
TOP PLATE LAP @ CORNERS & INTERSECTING WALLS	(2)10d NAILS		
WALL TO FOUNDATION	WALL SHTG. LAP W/ SILL PL. & FASTENED PER SHEAR WALL FASTENING SPEC.		

Space for Architect Seal

RESIDENCE FOR:

CUSTOMER NAME


JOB ADDRESS


SUBDIVISION NAME

XXXX-XXXX-XX XX.XX.XXXX COORD_NAME COORD_PHONE House Name: Drawing Scale: 1/8" = 1'0"

SERIES_NM Plan No.: PLAN NM



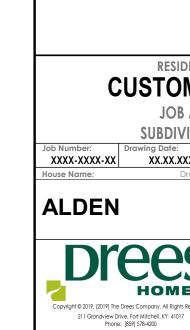

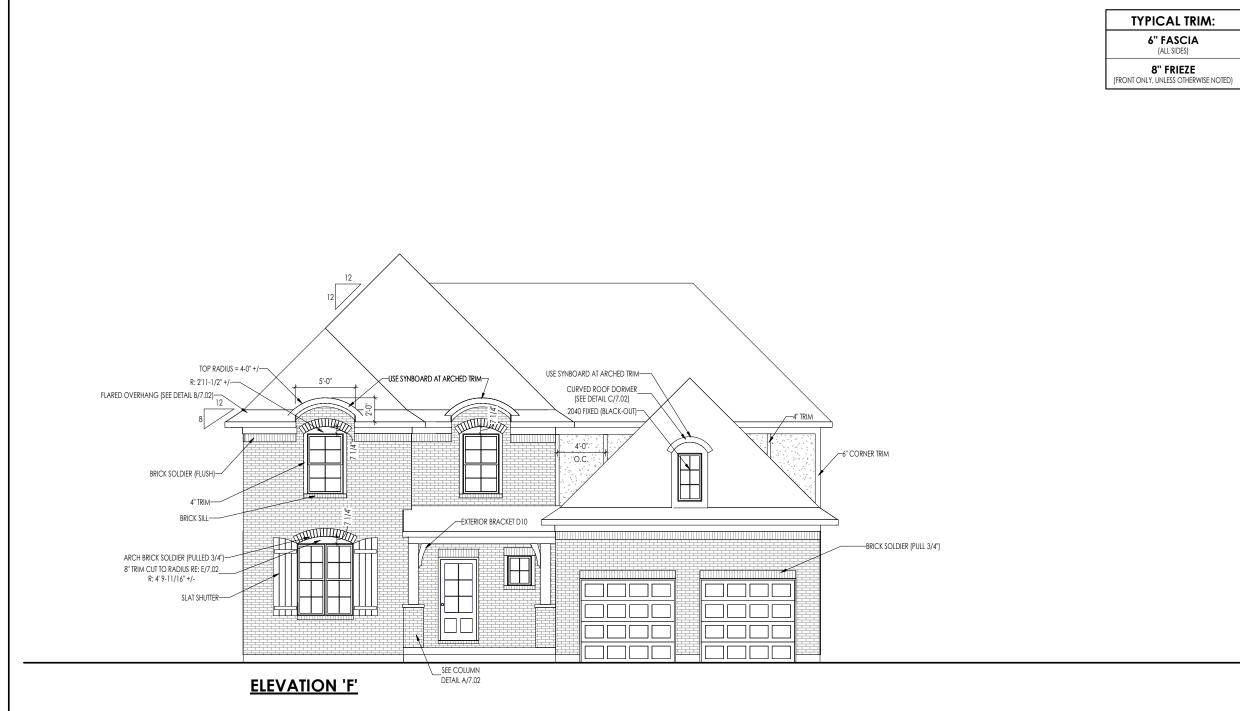

1. REFER TO SHEET ON.1 FOR GENERAL NOTES. 2. ROOFING MATERIAL PER SELECTIONS.

Key Notes:

- 1 (ELEV. A) CANTILEVER GABLE END TRUSS TO COVER STONE VENEER BELOW SEE DETAIL D/7.02
- 2 (ELEV. C) HOLD BOTTOM OF 8" TRIM 1'-7 1/4" ABOVE TOP OF WINDOWS.

BRICK and STONE LINTEL SCHEDULE

	SPAN	36" HIGH	48" HIGH	LINTEL SIZE	WINDOW ABOVE
*BRICK	Up to 6'-0"			L3 ½ x 3 ½ x ¼	
	Up to 8'-3"			L5 x 3 ½ x ¾6	
	Up to 9'-3"			L6 x 4 x 5/16	L7 x 4 x 3/8
	Up to 16'-3"	L7 x 4 x 3/8	L8 x 4 x ½	L8 x 4 x ½	**per Design
*STONE	Up to 6'-0"			L4 x 3 ½ x ¼	
	Up to 8'-3"			L5 x 3 ½ x ¾6	
	Up to 9'-3"		L6 x 4 x 3/8	L7 x 4 x 3/8	**per Design
	Up to 16'-3"		L8 x 4 x 1/2	**per Design	**per Design
				•	

All Lintels: 4" Minimum bearing required each end

* Brick is based on 40psf and Stone is based on 60psf

** Any lintels not described by the above parameters shall be specifically designed.

Space for Architect Seal

RESIDENCE FOR:

CUSTOMER NAME

JOB ADDRESS

SUBDIVISION NAME XXXX-XXXX-XX XX.XX.XXXX COORD_NAME


House Name:

ALDEN

SERIES_NM Plan No.: PLAN NM

COORD_PHONE



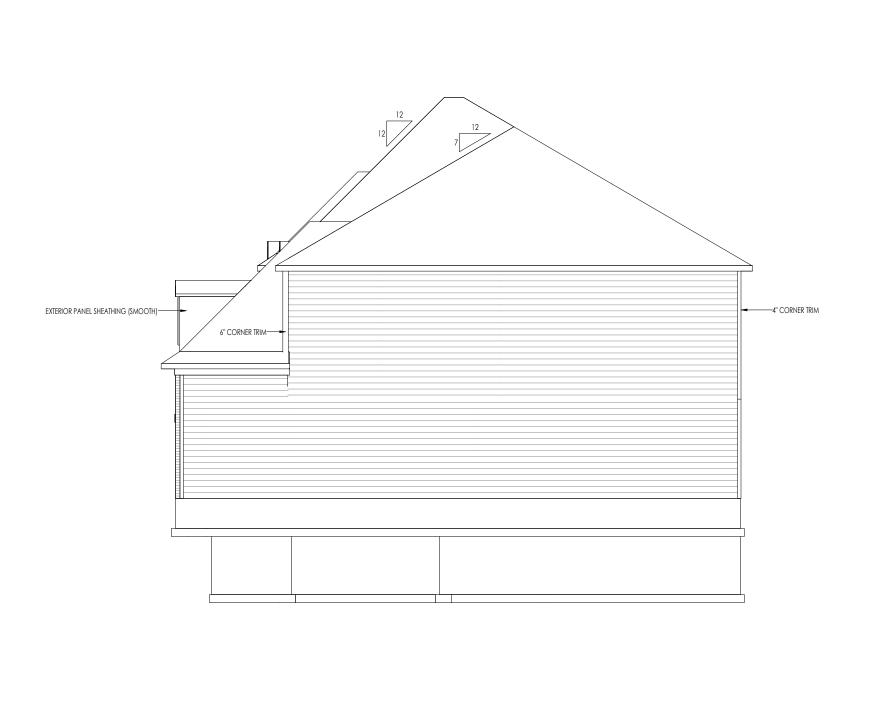

TYPICAL TRIM:

6" FASCIA (ALL SIDES)

8" FRIEZE (FRONT ONLY, UNLESS OTHERWISE NOTED)

General Notes:			
REFER TO SHEET ON.1 FOR GENERAL NOTES. ROOFING MATERIAL PER SELECTIONS. REFER TO LINTEL SCHEDULE AS NEEDED ON SHEET 6.01.			
Key Notes:			
1 -			
2 -			
3 -			
4 -			
5			
Space for Architect Seal			
RESIDENCE FOR:			
CUSTOMER NAME			

JOB ADDRESS

SUBDIVISION NAME

Job Number: XXXX-XXXX-XX XX.XX.XXXX COORD_NAME COORD_PHONE House Name:

ALDEN

SERIES_NM Plan No.: PLAN_NM

HOMES_{SM}

Garage Side Elevation Elevation "F"

Copyright © 2019, [2019] The Drees Company, All Rights Reserved. 211 Grandview Drive, Fort Mitchell, KY 41017 Phone: [859] 578-4200




COORD_PHONE

Plan No.:

Elevation "F"

SERIES_NM

PLAN_NM

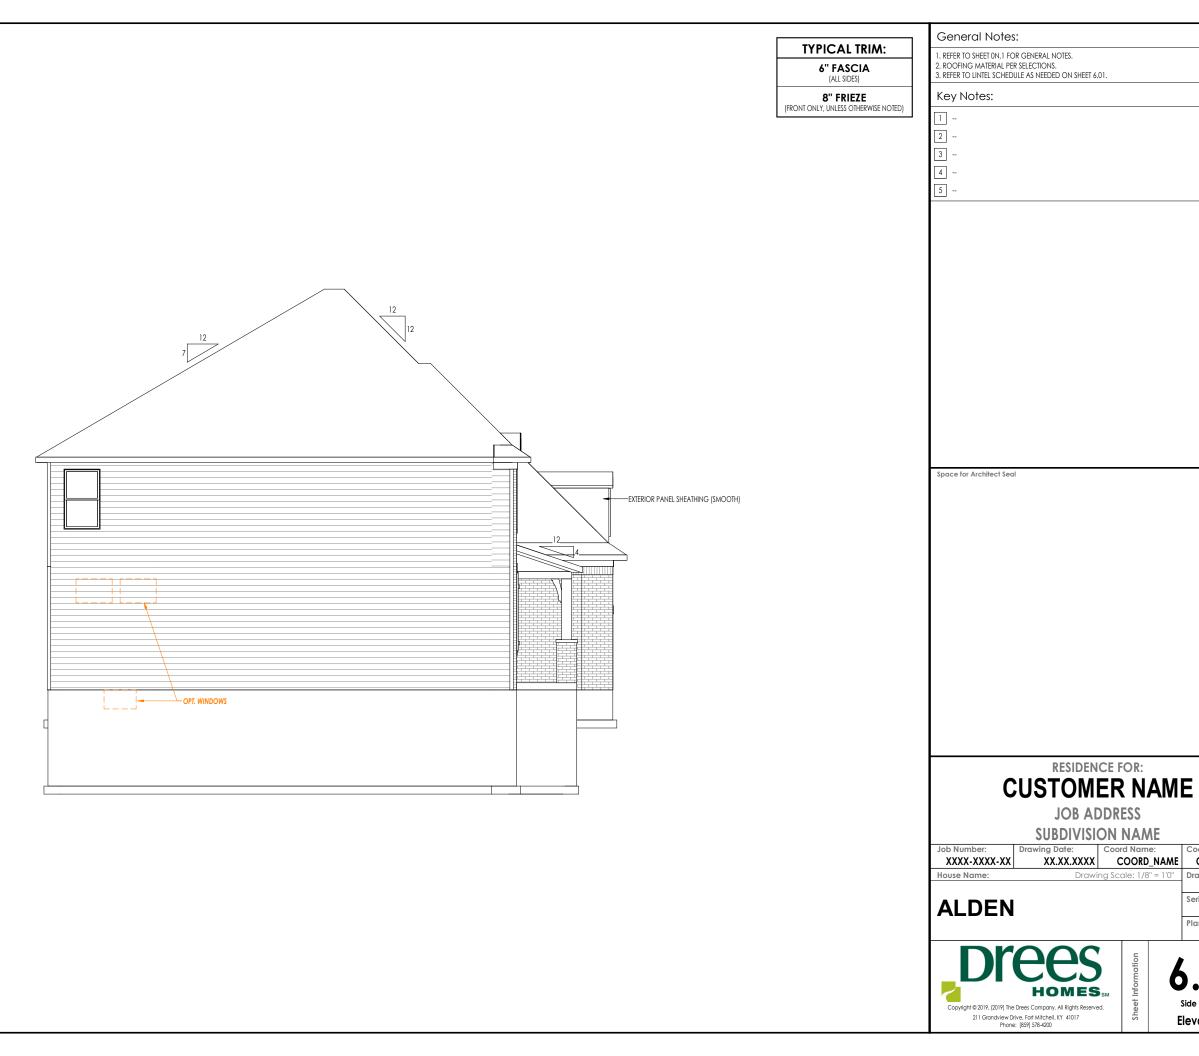

COORD_PHONE

Plan No.:

Elevation "F"

SERIES_NM

PLAN_NM