




25
B.L.
D.E.
D.&U.E.
D.U.&S.S.E.
C.A.
L.M.A.E.
R/W
T.C.E.

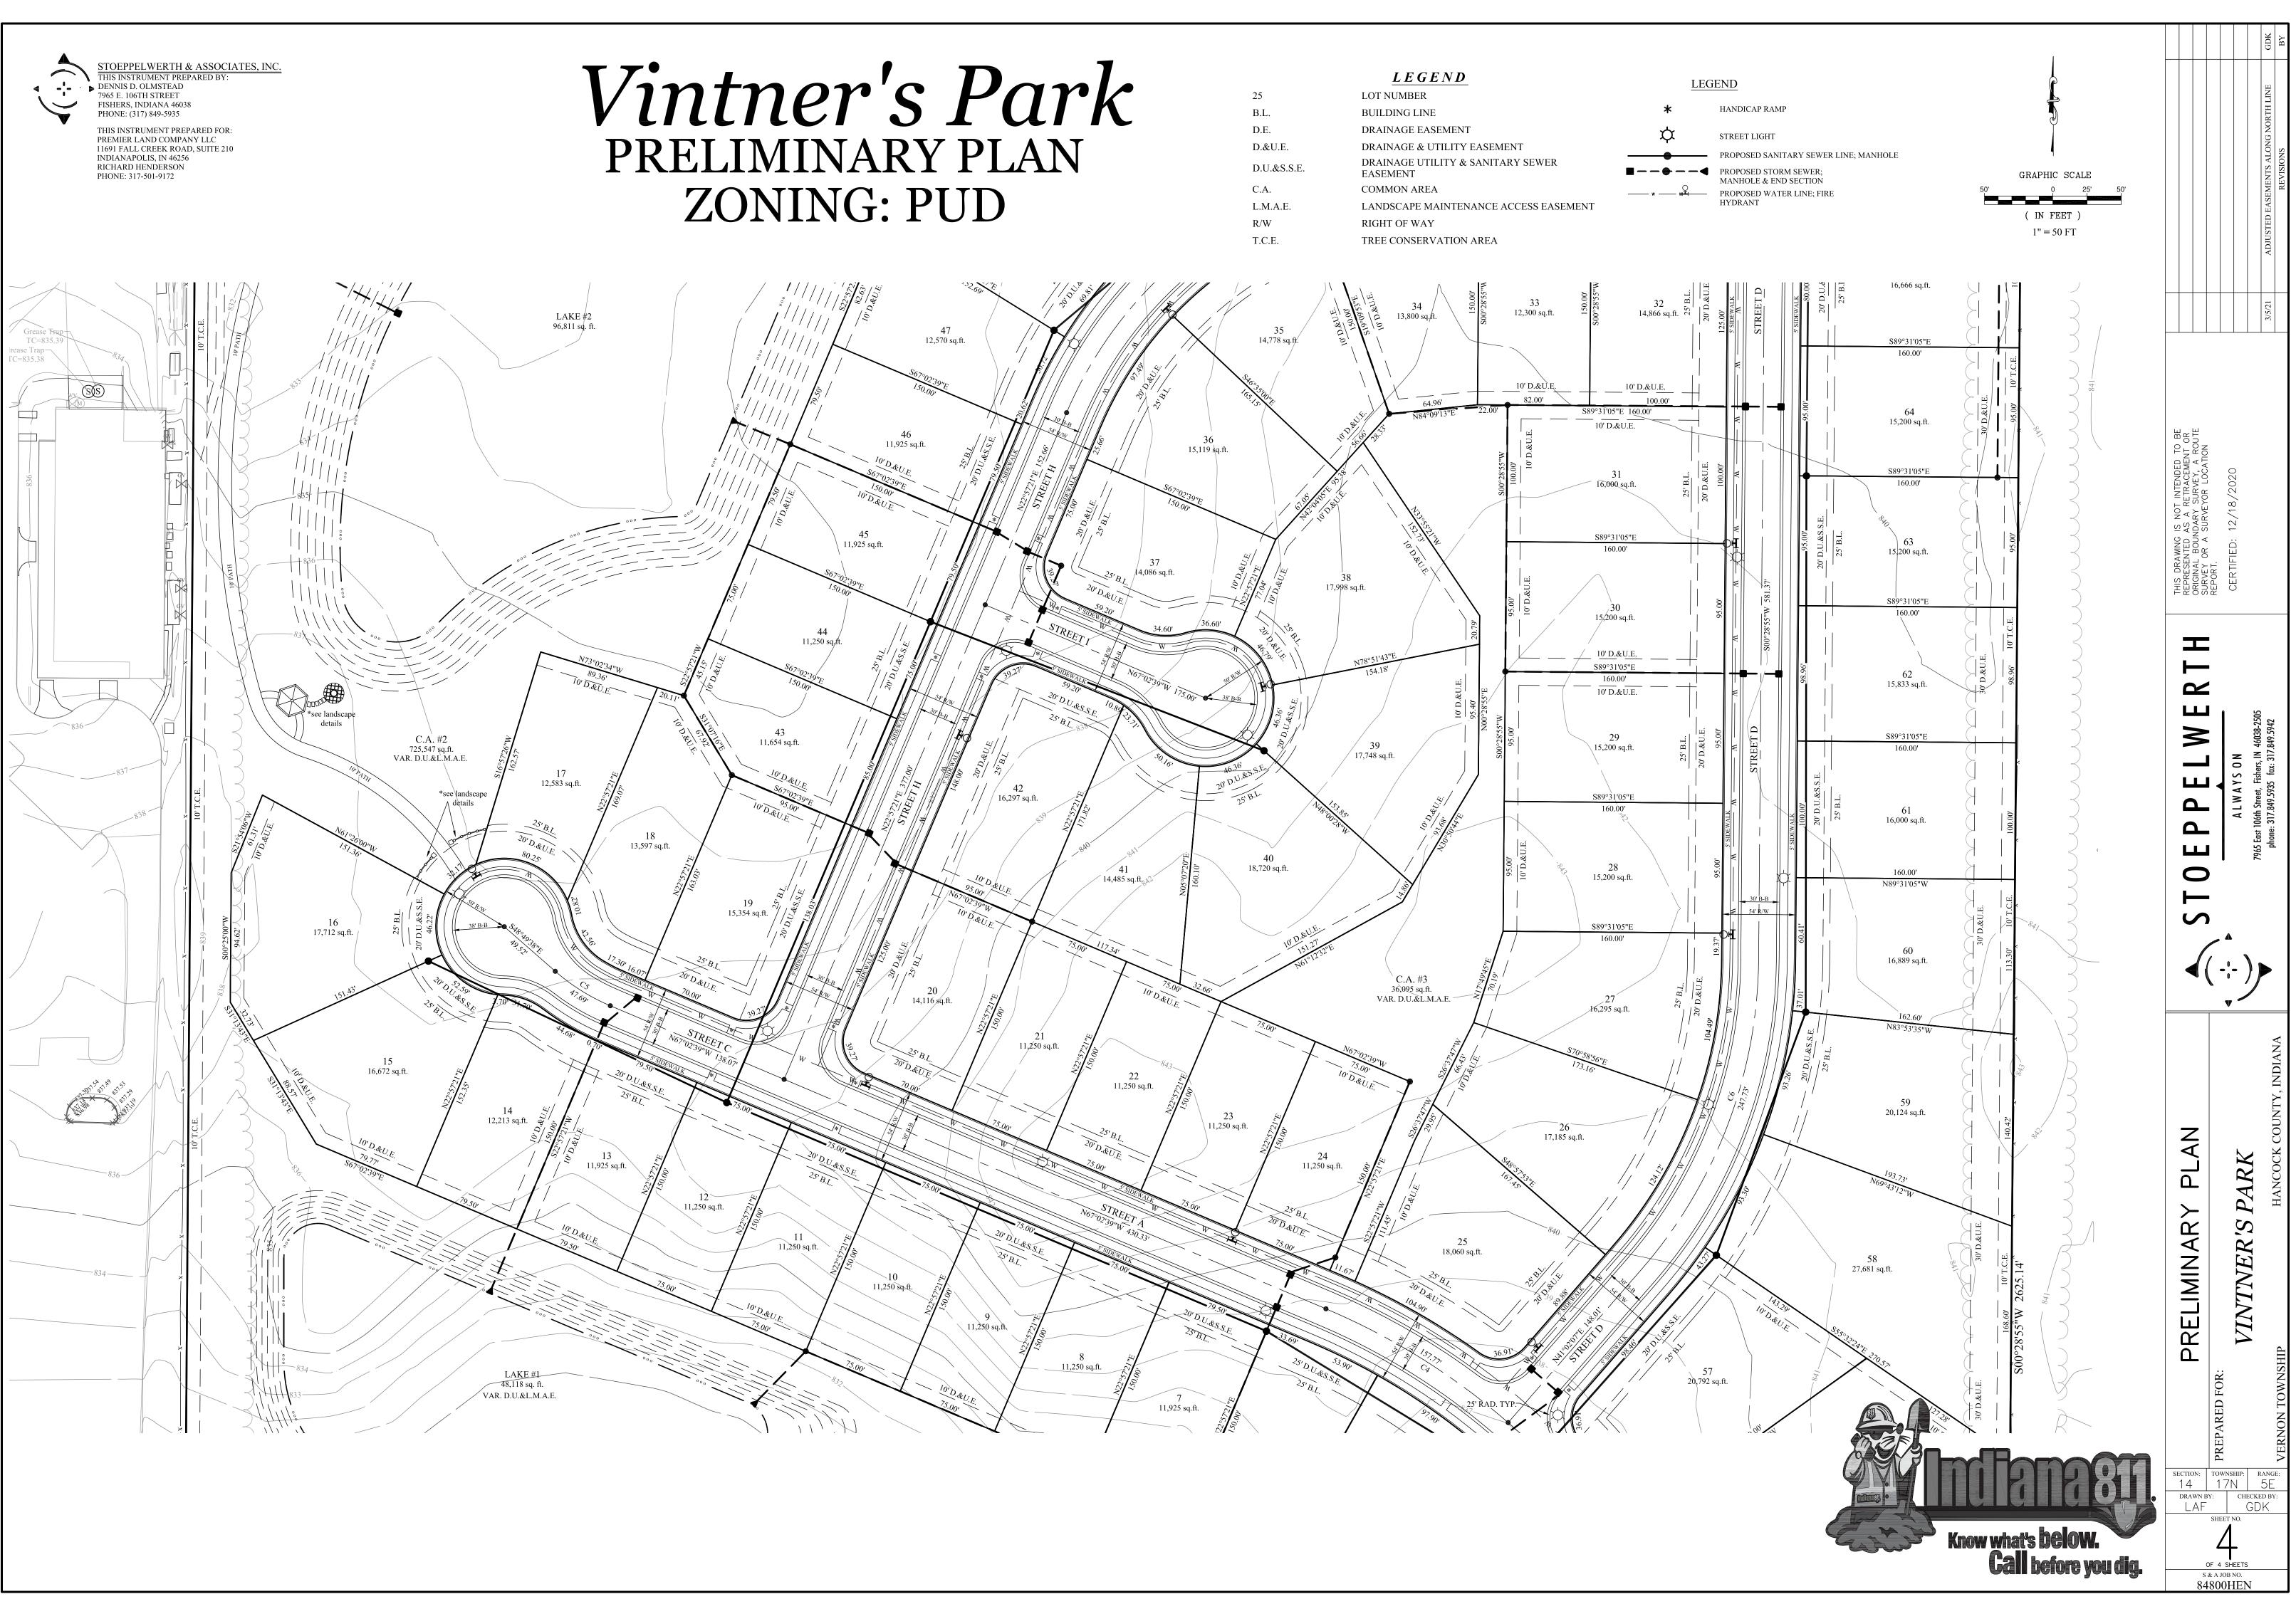


STOEPPELWERTH & ASSOCIATES, INC THIS INSTRUMENT PREPARED BY: 7965 E. 106TH STREET

# PRELIMINARY PLAN ZONING: PUD

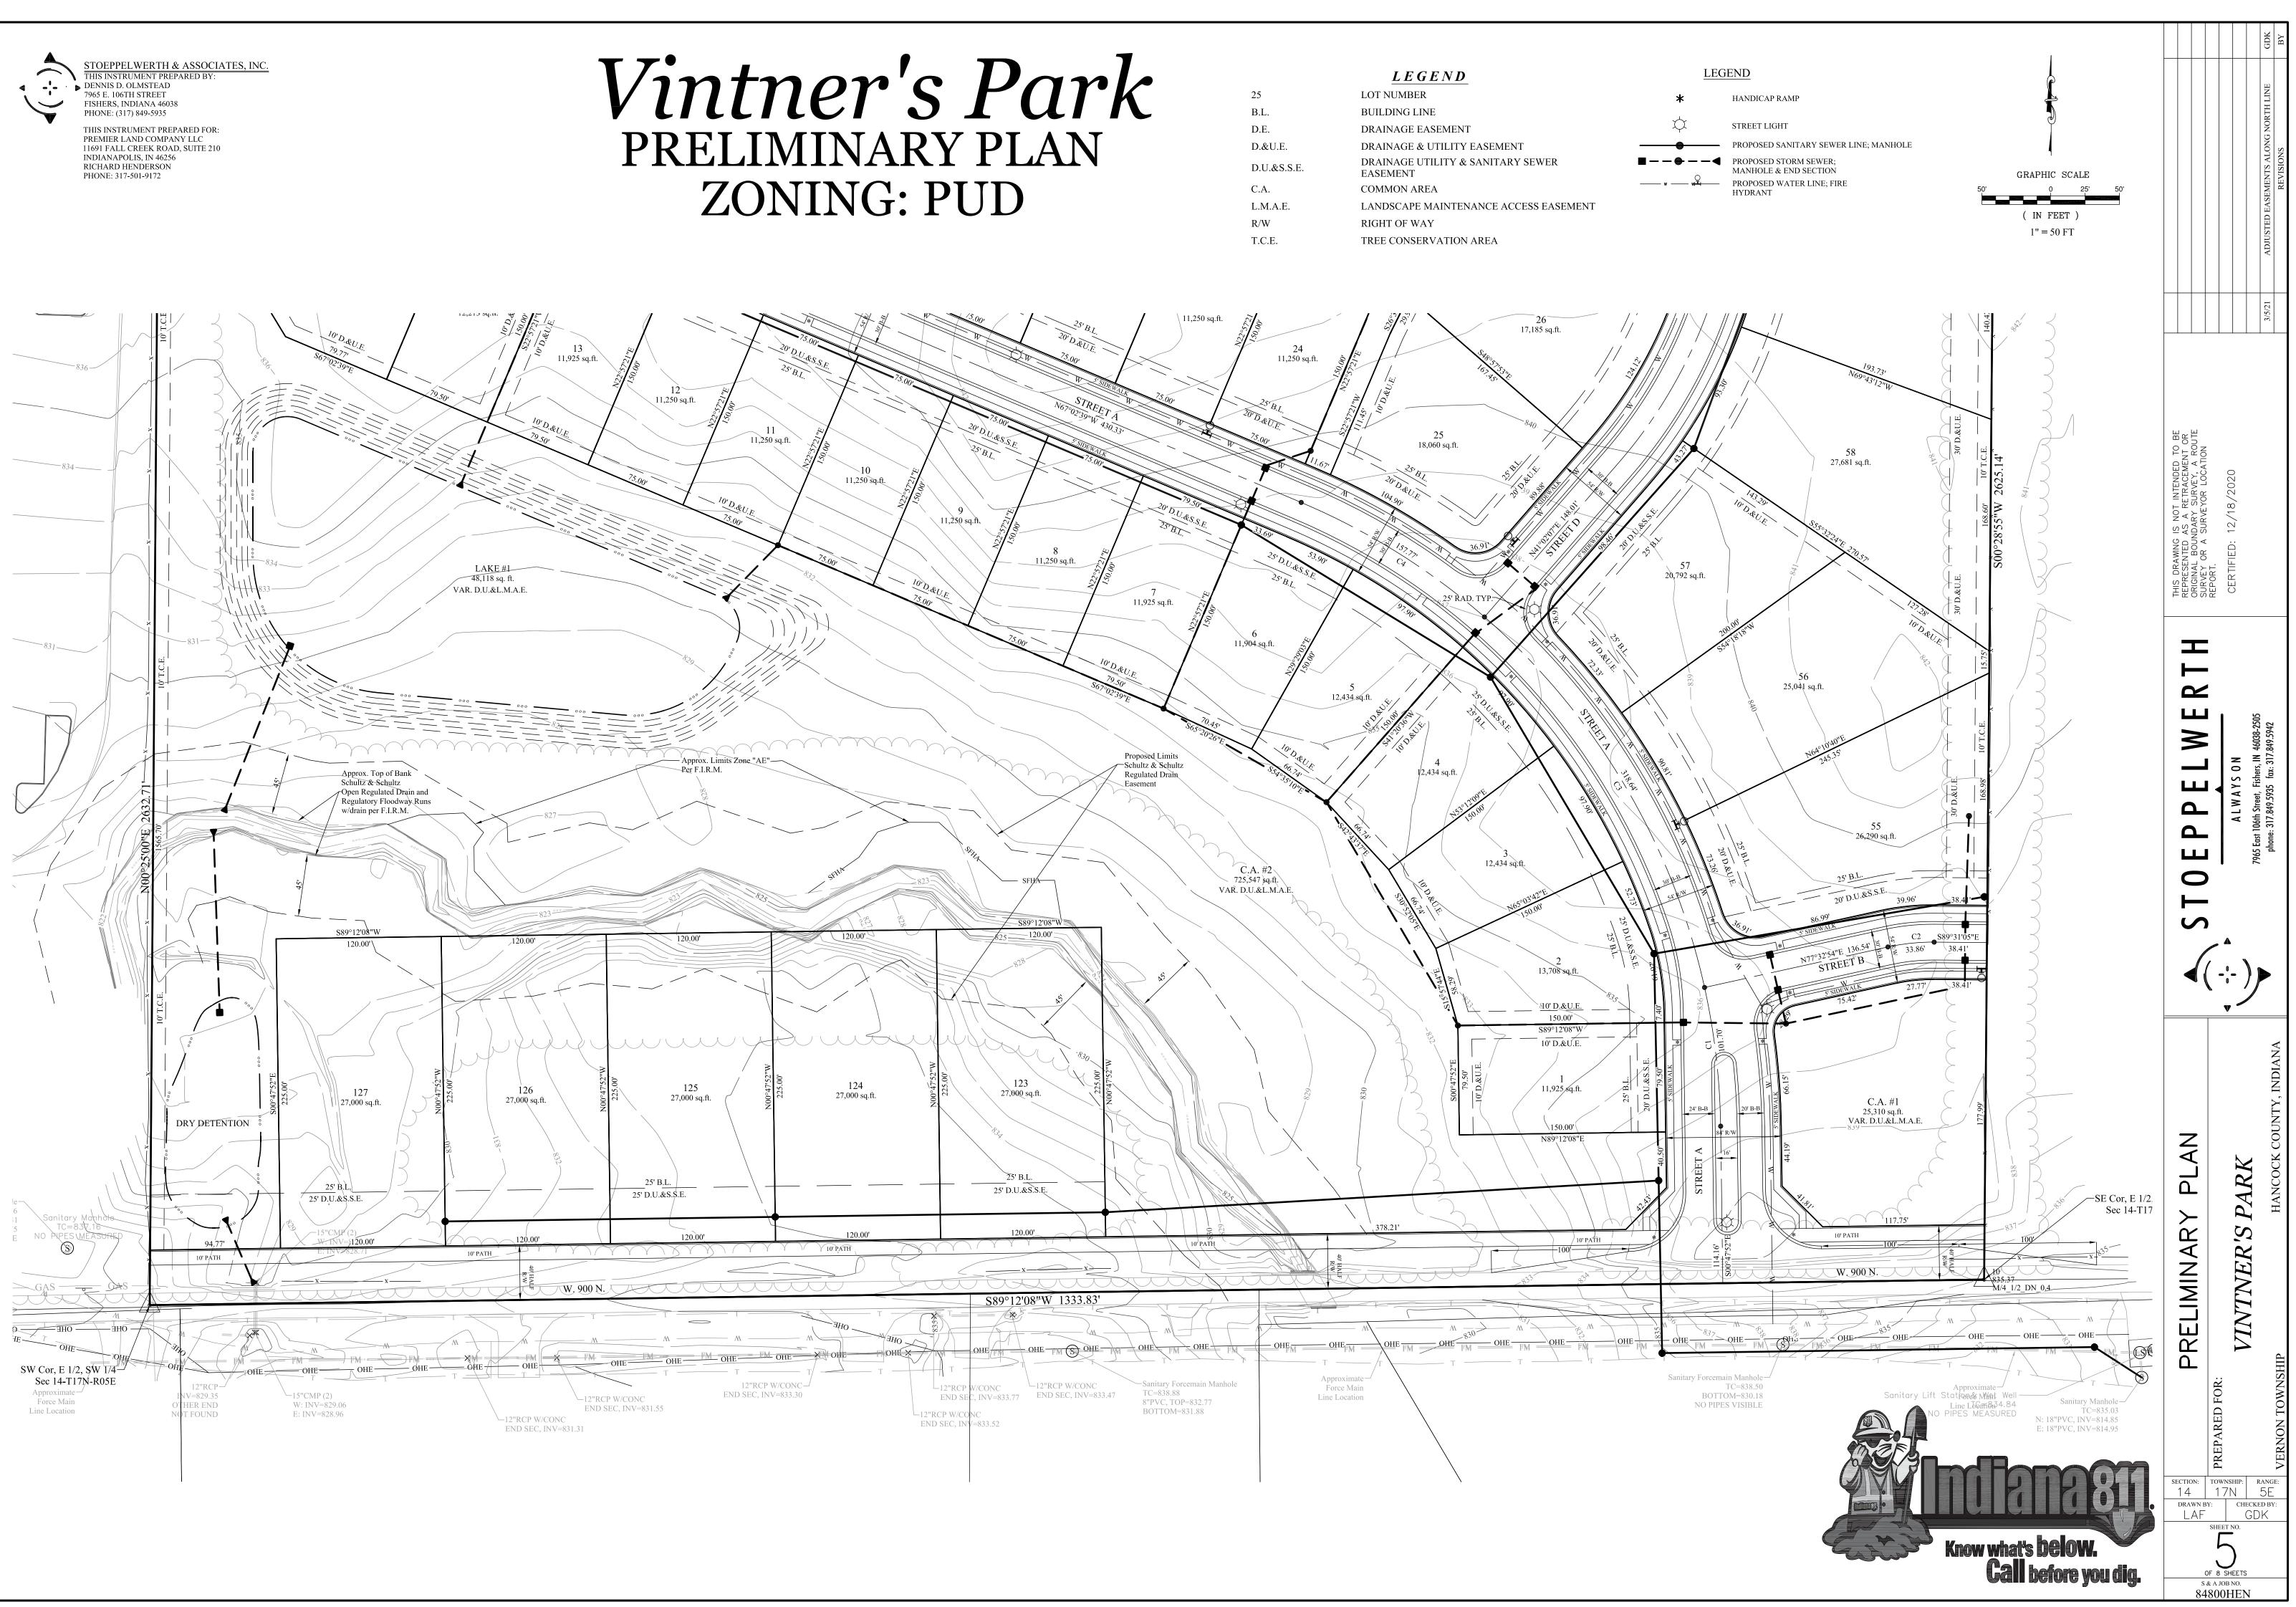

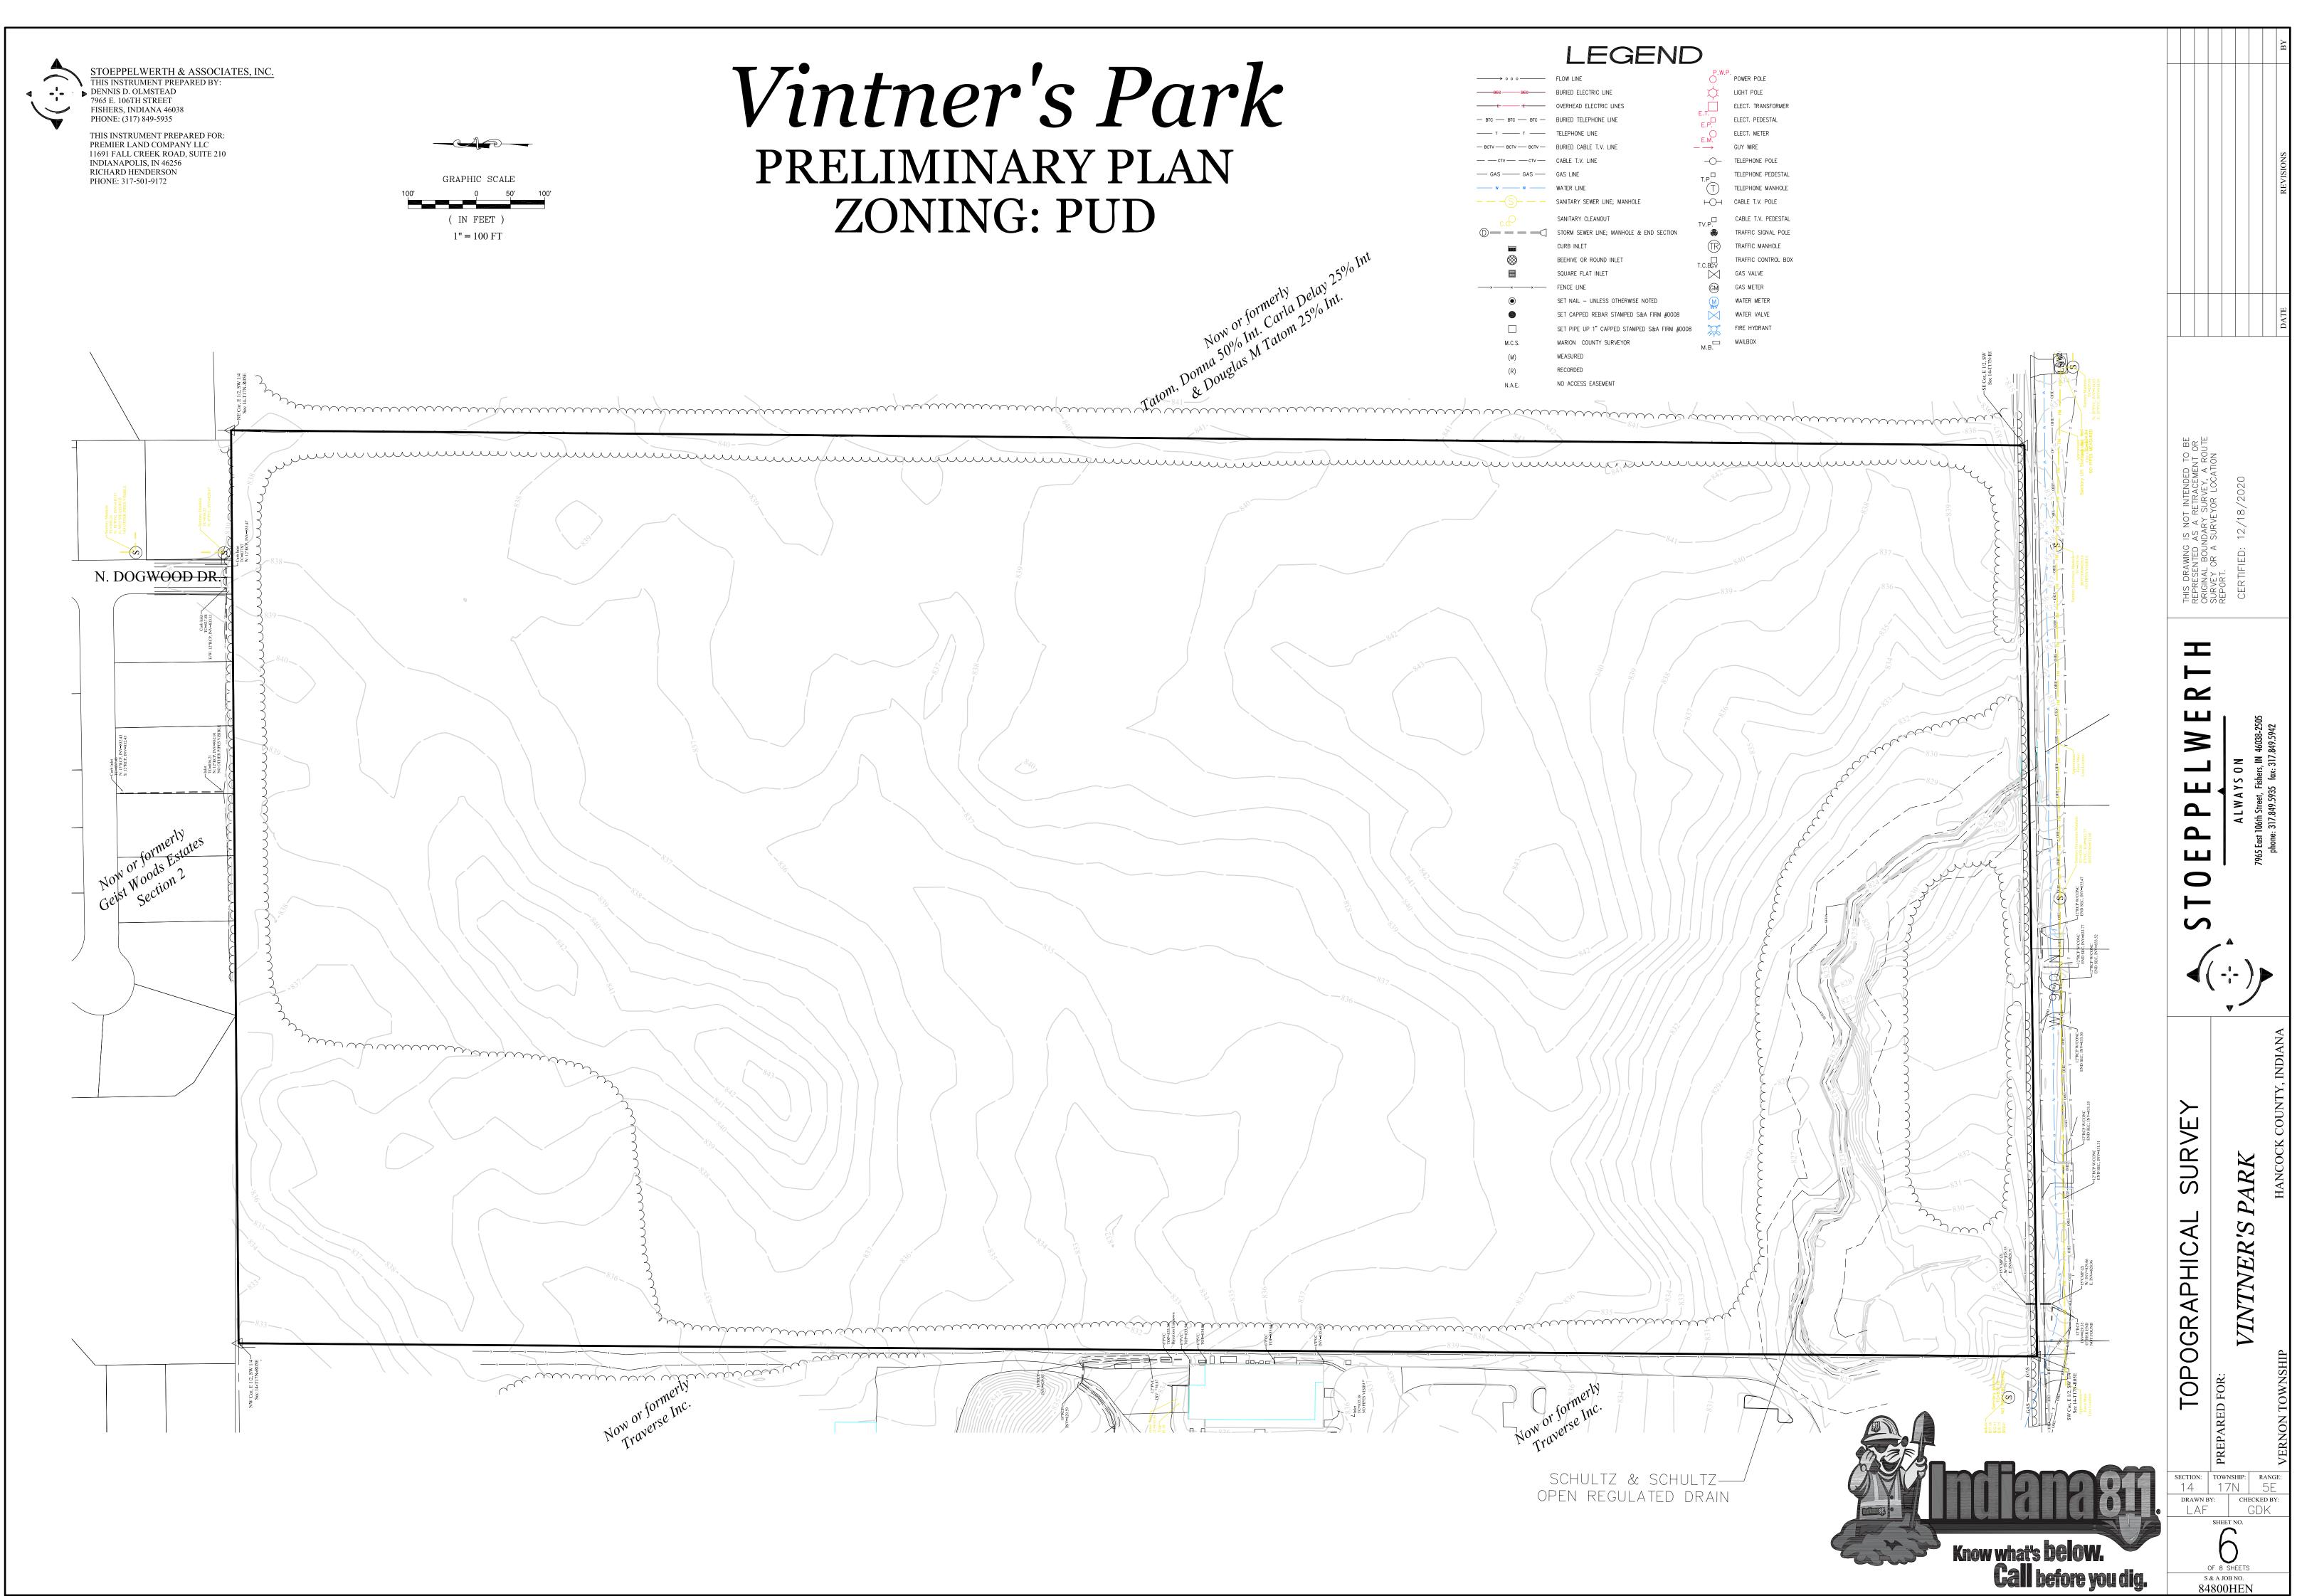

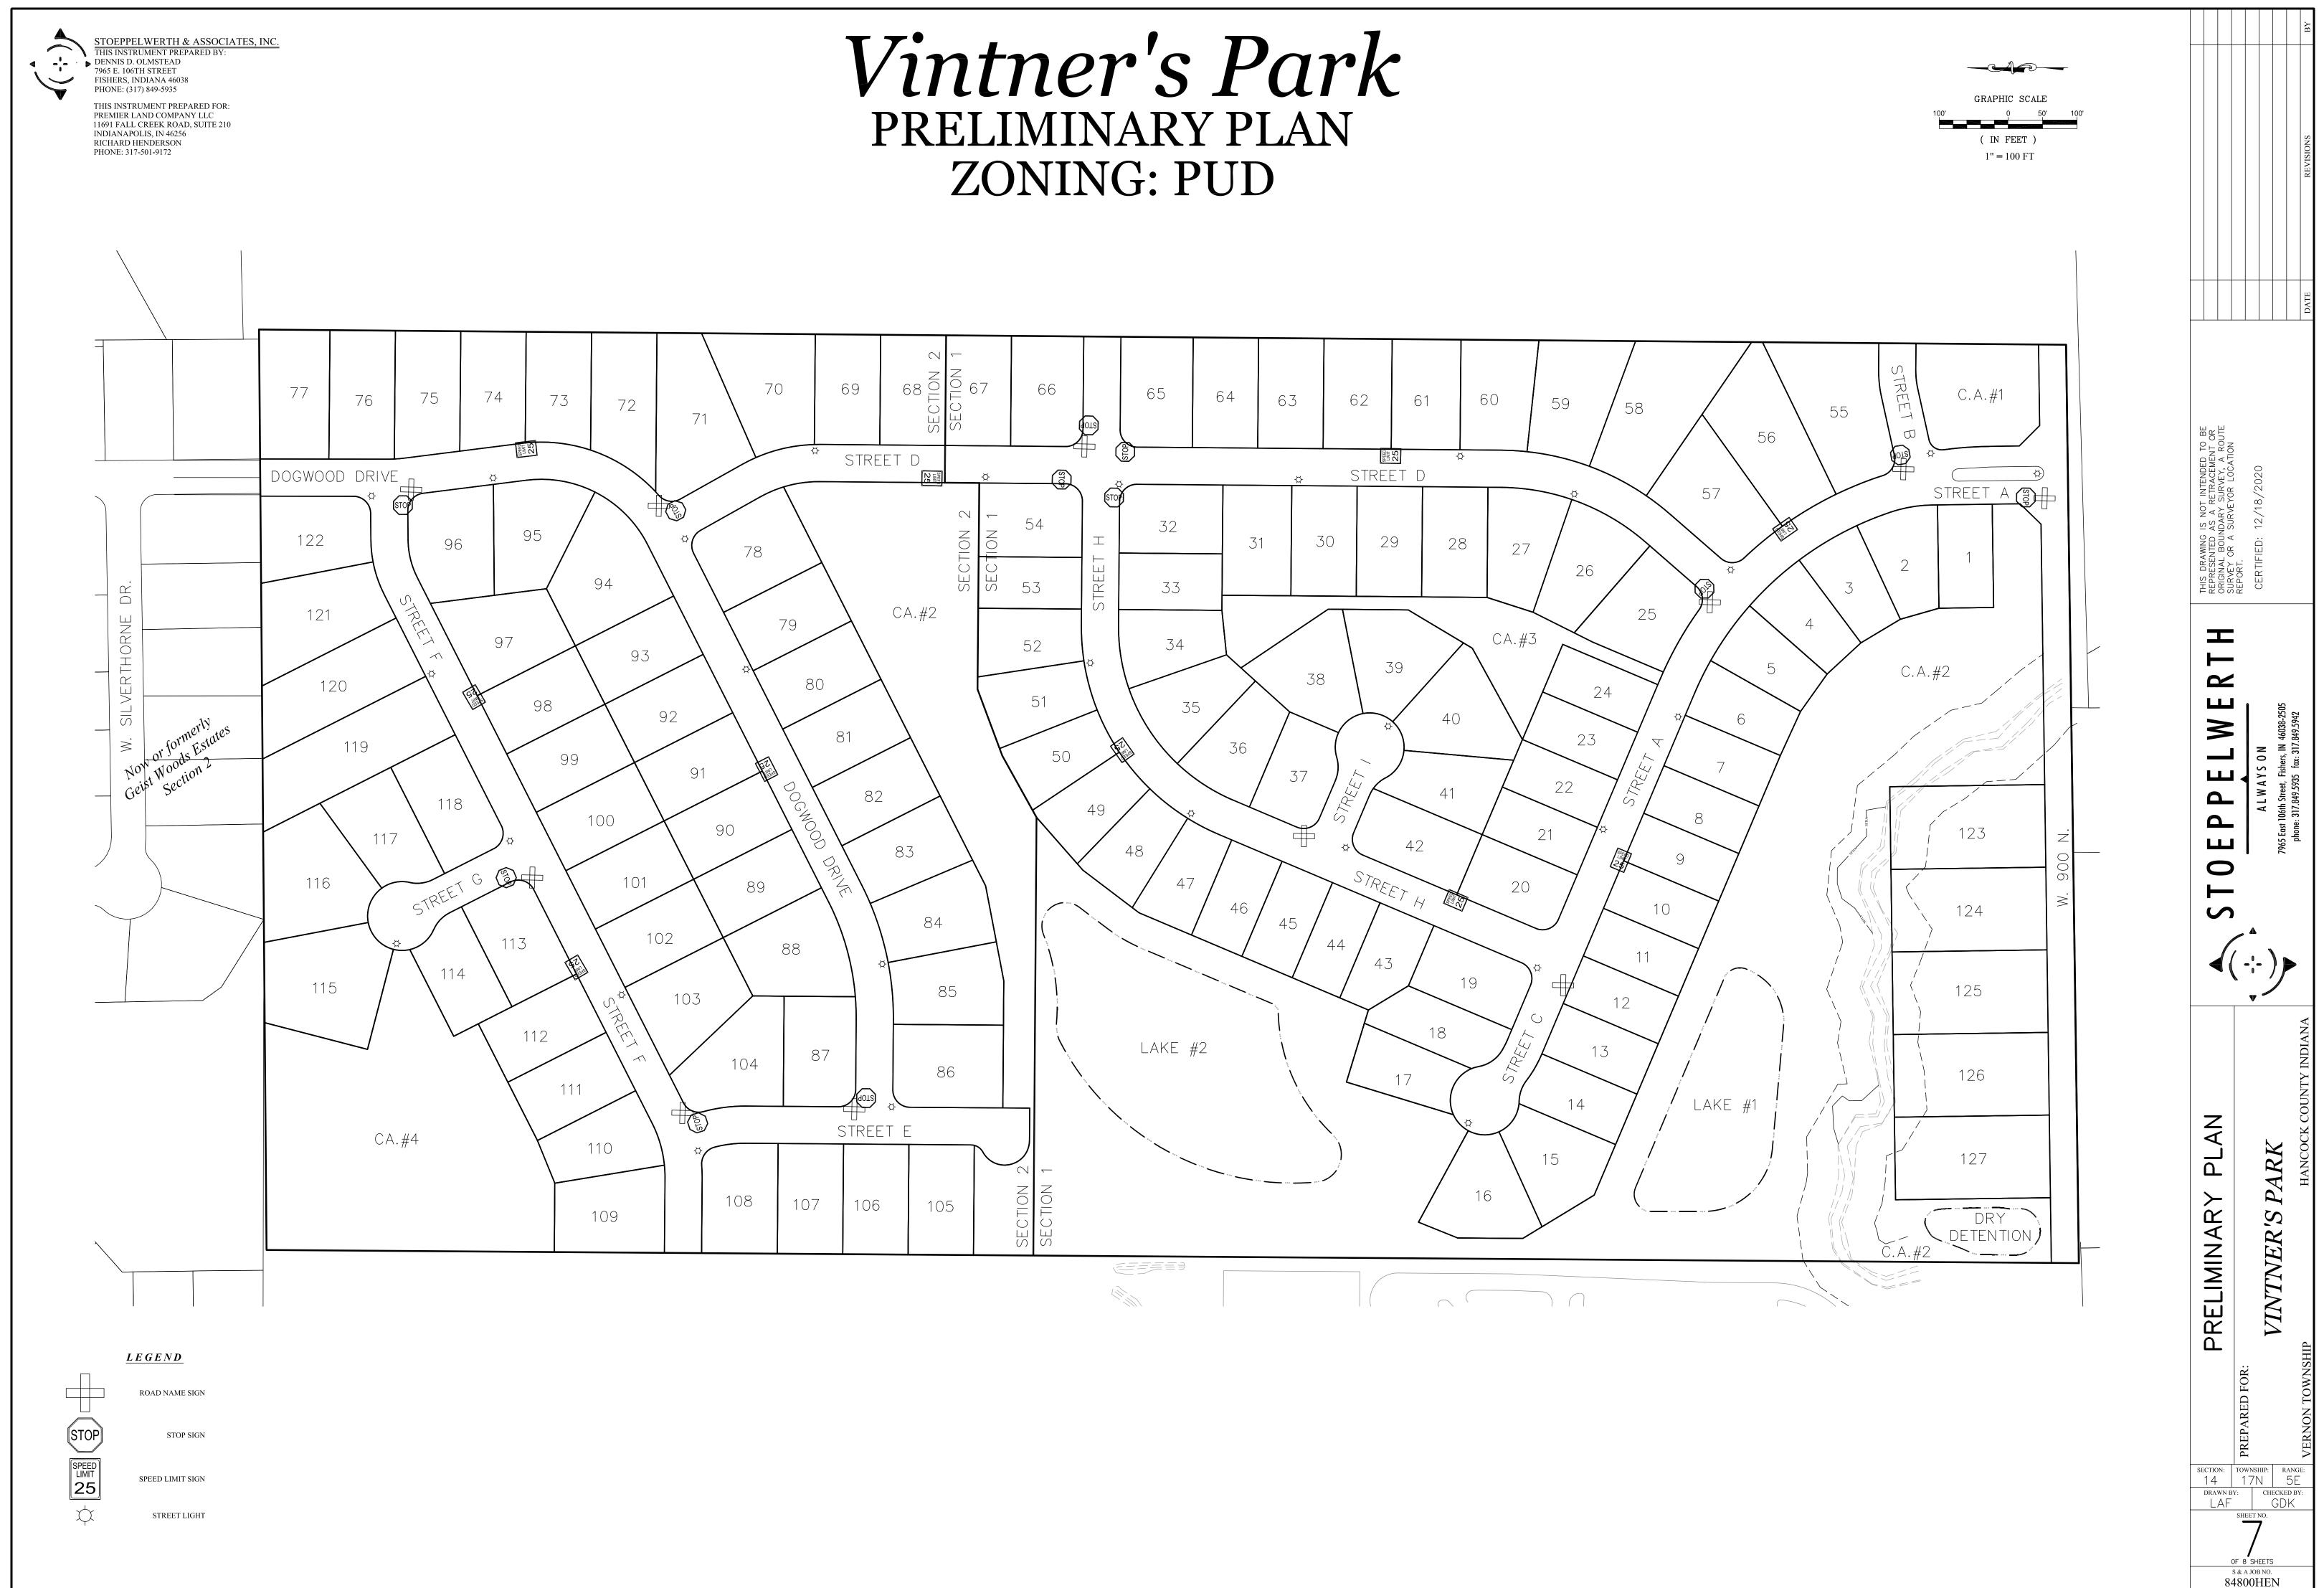

STOEPPELWERTH & ASSOCIATES, INC. THIS INSTRUMENT PREPARED BY: DENNIS D. OLMSTEAD 7965 E. 106TH STREET FISHERS, INDIANA 46038 PHONE: (317) 849-5935 THIS INSTRUMENT PREPARED FOR: PREMIER LAND COMPANY LLC 11691 FALL CREEK ROAD, SUITE 210


INDIANAPOLIS, IN 46256 RICHARD HENDERSON PHONE: 317-501-9172

 $\sim$ 

◄ -!-

## Exhibit C – Lighting Specifications

### **Decorative Lighting Specification - K124R-BAAR**

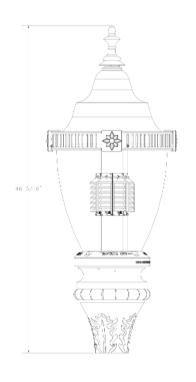


1. Lamps/Lamp Holder Lamps shall be an array of solid state light emitting diodes mounted to a multi-sided, vertical heat sink of highly conductive aluminum. The LED emitters are mounted to removable circuit boards such that they are in full thermal contact with the vertical heat sink. The vertical heat sink is open at the bottom and vented at the top to provide appropriate fluid cooling for the LED array. The emitters are arranged in various patters on each face of the vertical heat sink to provide the required light distribution. The LED arrays include optical baffles constructed of polished aluminum extrusion optical grade ABS plastic with a vacuum metallised reflective surface or to control uplight and light distribution. The LED emitters shall have an efficacy of not less than 80 lumens per watt.


2. Protective Globe The Protective Globe shall be moulded of either; rippled polycarbonate Miles Makrolon GP/OP Thermoplastic Polymer, or equiv., or rippled acrylic Acrylite Plus Acrylic Polymer, or equiv., having a minimum thickness of 0.125" with an overall diameter of 15.75" and an over-all height of 33.75". An optional Spun Aluminum Top (as shown) with a minimum wall 0.06" thick and Decorative Ring may be included in the assembly.

The Luminaire Globe Assembly is a self contained unit consisting of the Globe itself, a rugged cast locking ring, and the LED light engine consisting of vertical heat sink tower, circuit boards, LED emitter arrays, and optical baffles. The LED light engine is of a modular design, and is able to be quickly removed from the globe assembly with out need to disassemble the globe assembly itself. The Globe Assembly is secured to the main housing by means of a spring-tensioned, Twist-Locking unit to allow tool-less removal of the Globe, while maintaining a secure seal between the Globe Assembly and the Main body of the luminaire, making the K124R suitable for an outdoor environment.


High performance protection against water or dust particle ingress is available by means of a non-porous, closed-cell Silicon Rubber O-Ring gasket which is highly efficient in sealing against particle ingress over a wide temperature range ( $-40^{\circ}$ F to  $310^{\circ}$ F).

3.Driver The driver, or ballast, for the LED emitters shall be Class 2 electronic capable of input voltages from 120V through to 277V. The case shall be minimum IP66 seal rated. The driver shall have an input voltage and max wattage clearly identified. The ballast assembly will be mounted on a heavy duty fabricated aluminum mounting bracket to allow complete tool-less maintenance.

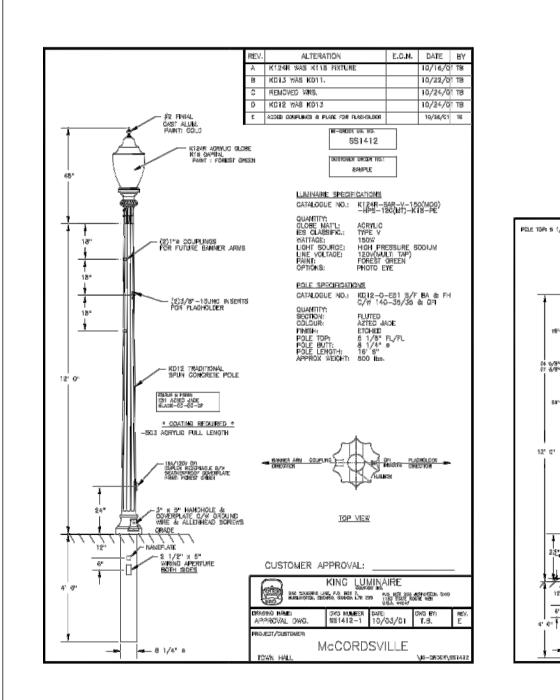

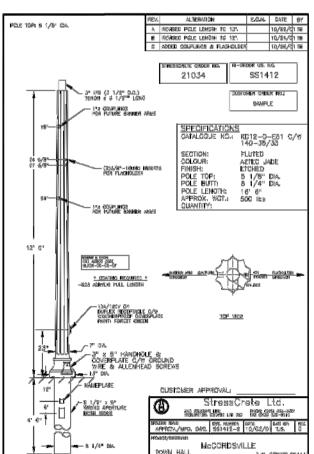



## Vintner's Park PRELIMINARY PLAN ZONING: PUD

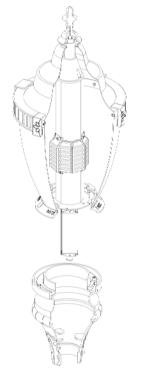


**5.** Wiring. All internal wiring and connections shall be completed so that it will be necessary only to attach the incoming supply connectors to Mate-N-Loc connectors or to a terminal block. Terminal blocks shall be certified to 250V, 70A and consist of three sets of terminals. They shall be rated to 250V and meet NEMA Specifications for Wiring Terminals. Mate-N-Loc shall be certified for 600V operation. Internal wire connectors shall be crimp connector only and rated at 1000V and 150°C. All wiring to be CSA certified and/or UL listed, type SFF-2, SEWF-2, or SEW-2 No. 14 gauge, 150°C, 600V, and color coded for the required voltage.

6. Miscellaneous. All exterior hardware and fasteners, wholly or partly exposed, shall be stainless-steel alloy. All internal fasteners shall be stainless-steel or zinc coated steel. All remaining internal hardware shall be stainless steel, aluminium alloy, or zinc coated steel.

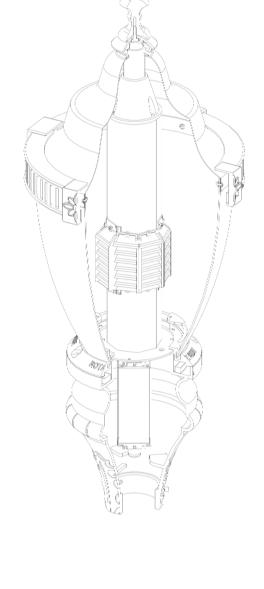



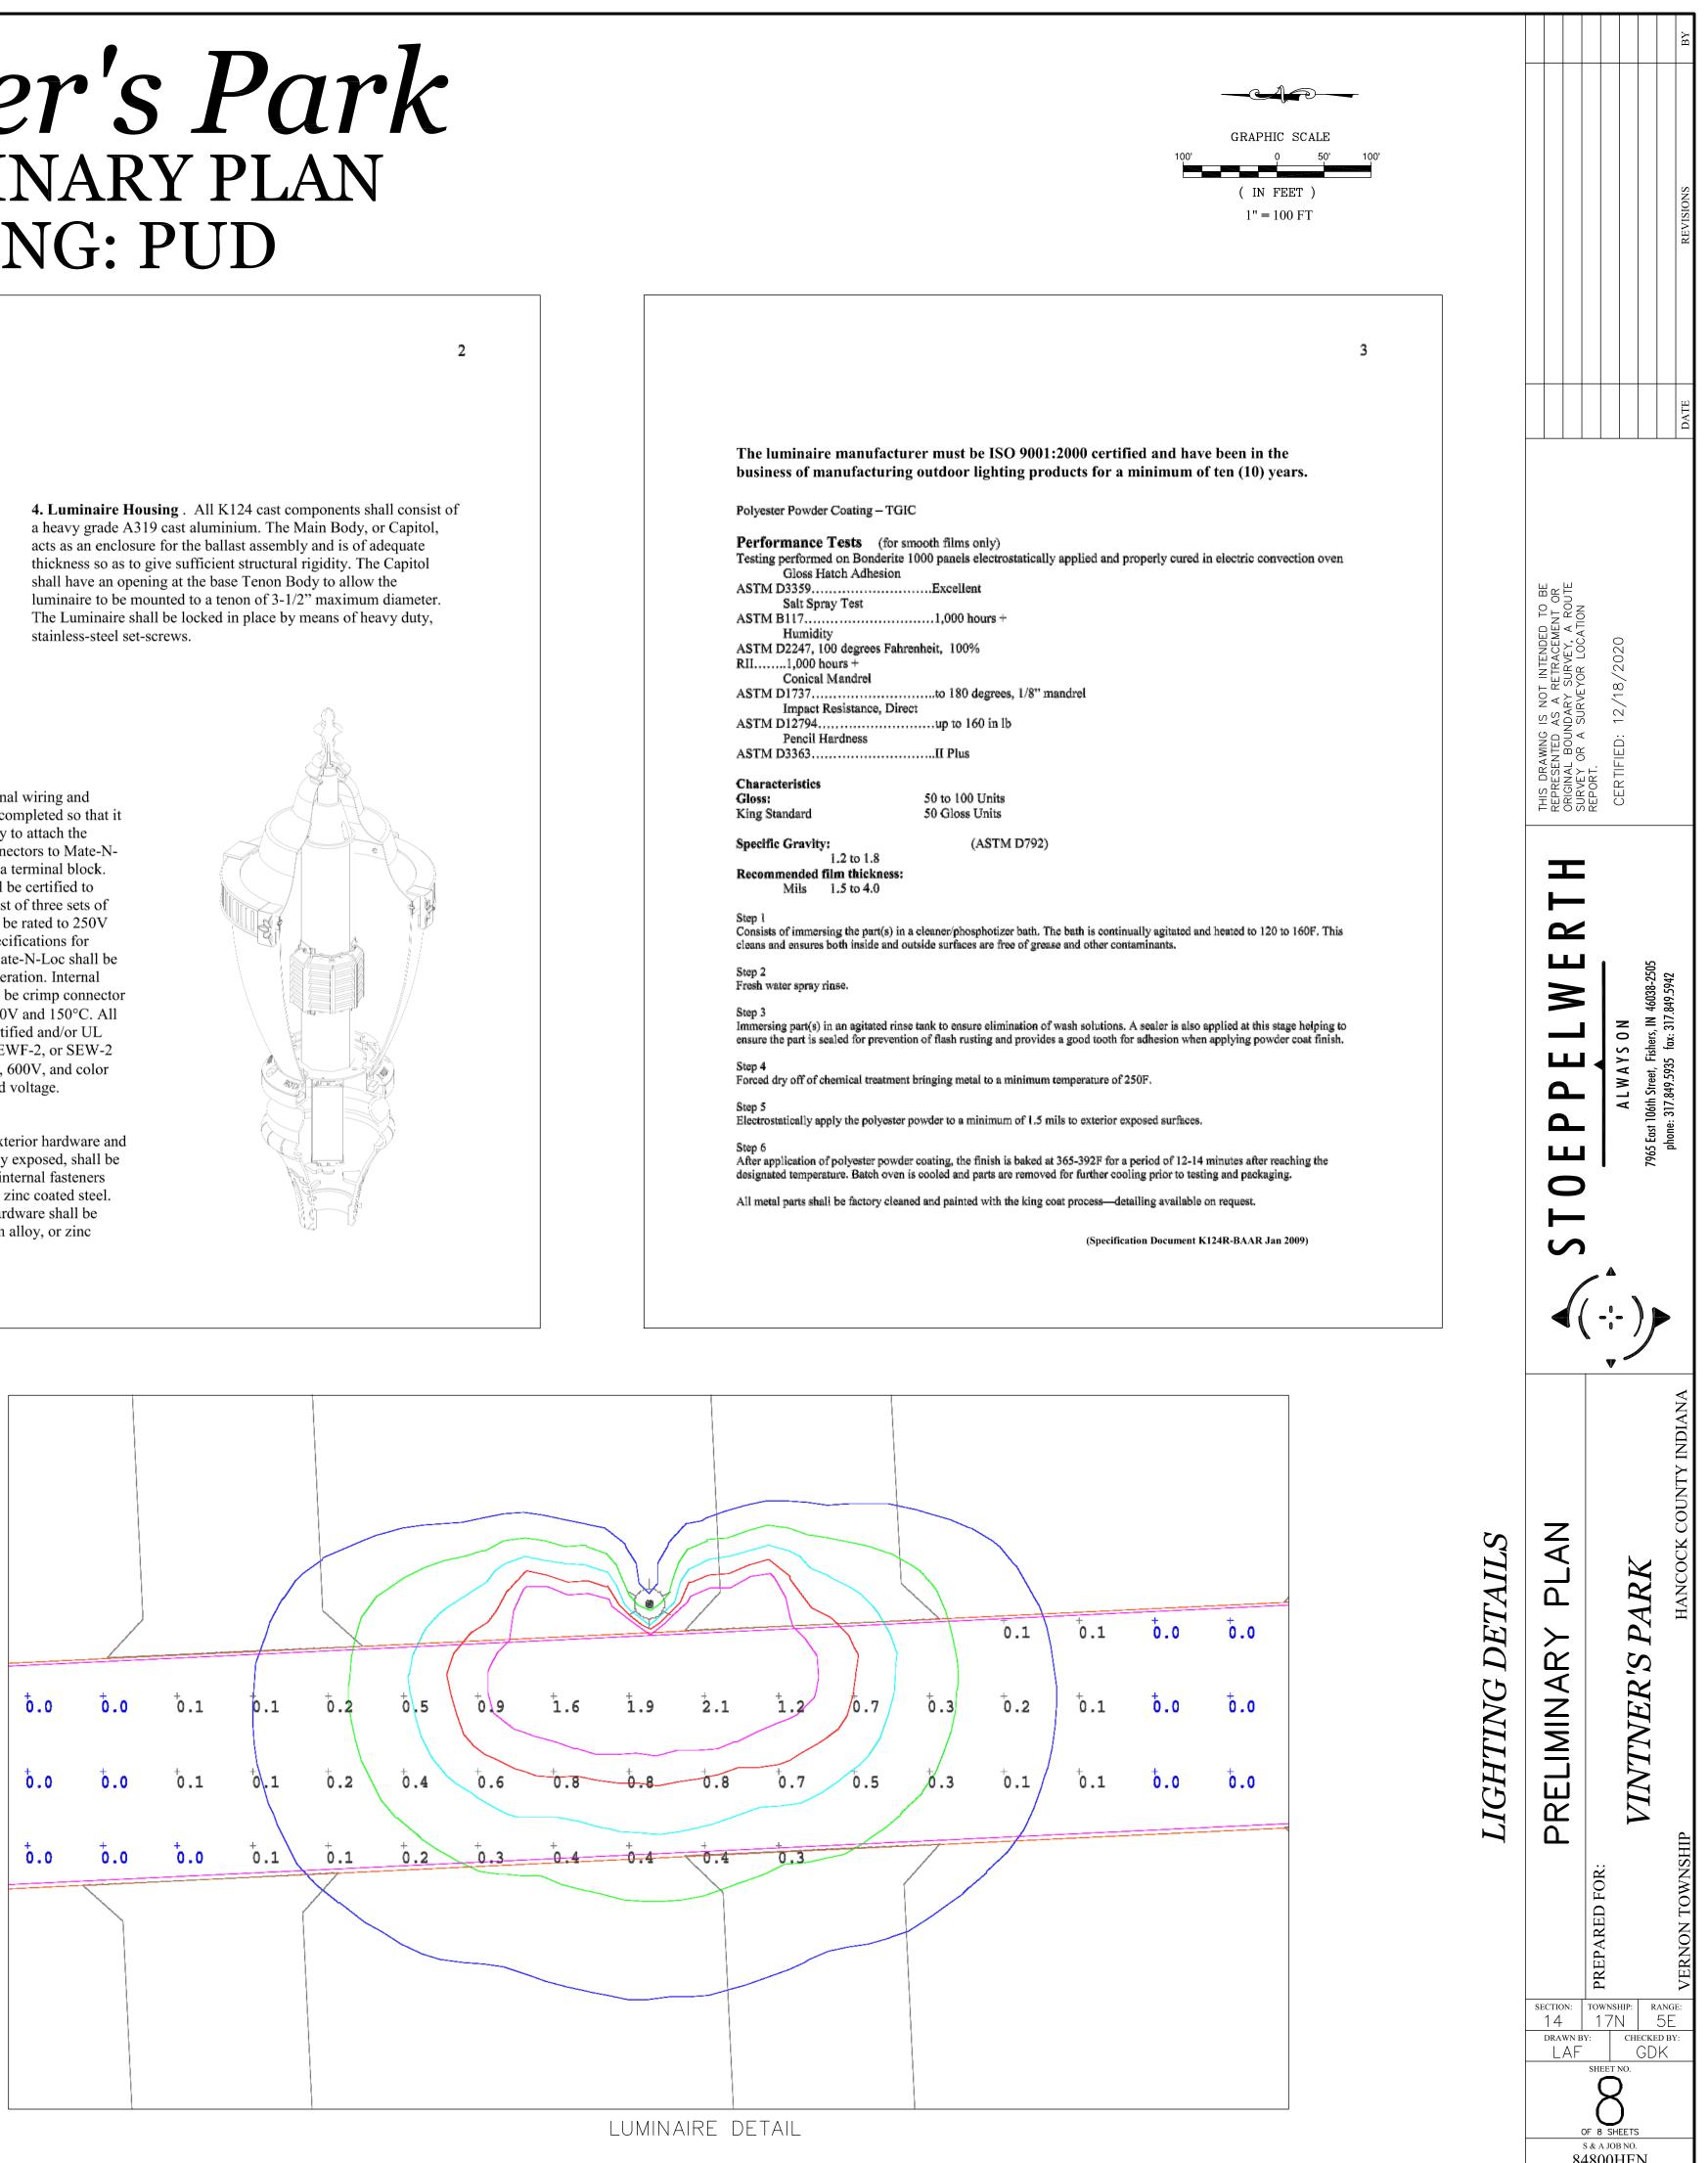

84800HEN